


# Measurement Systems International

DYNA-LINK APPLICATIONS -  
UTILITY INDUSTRY

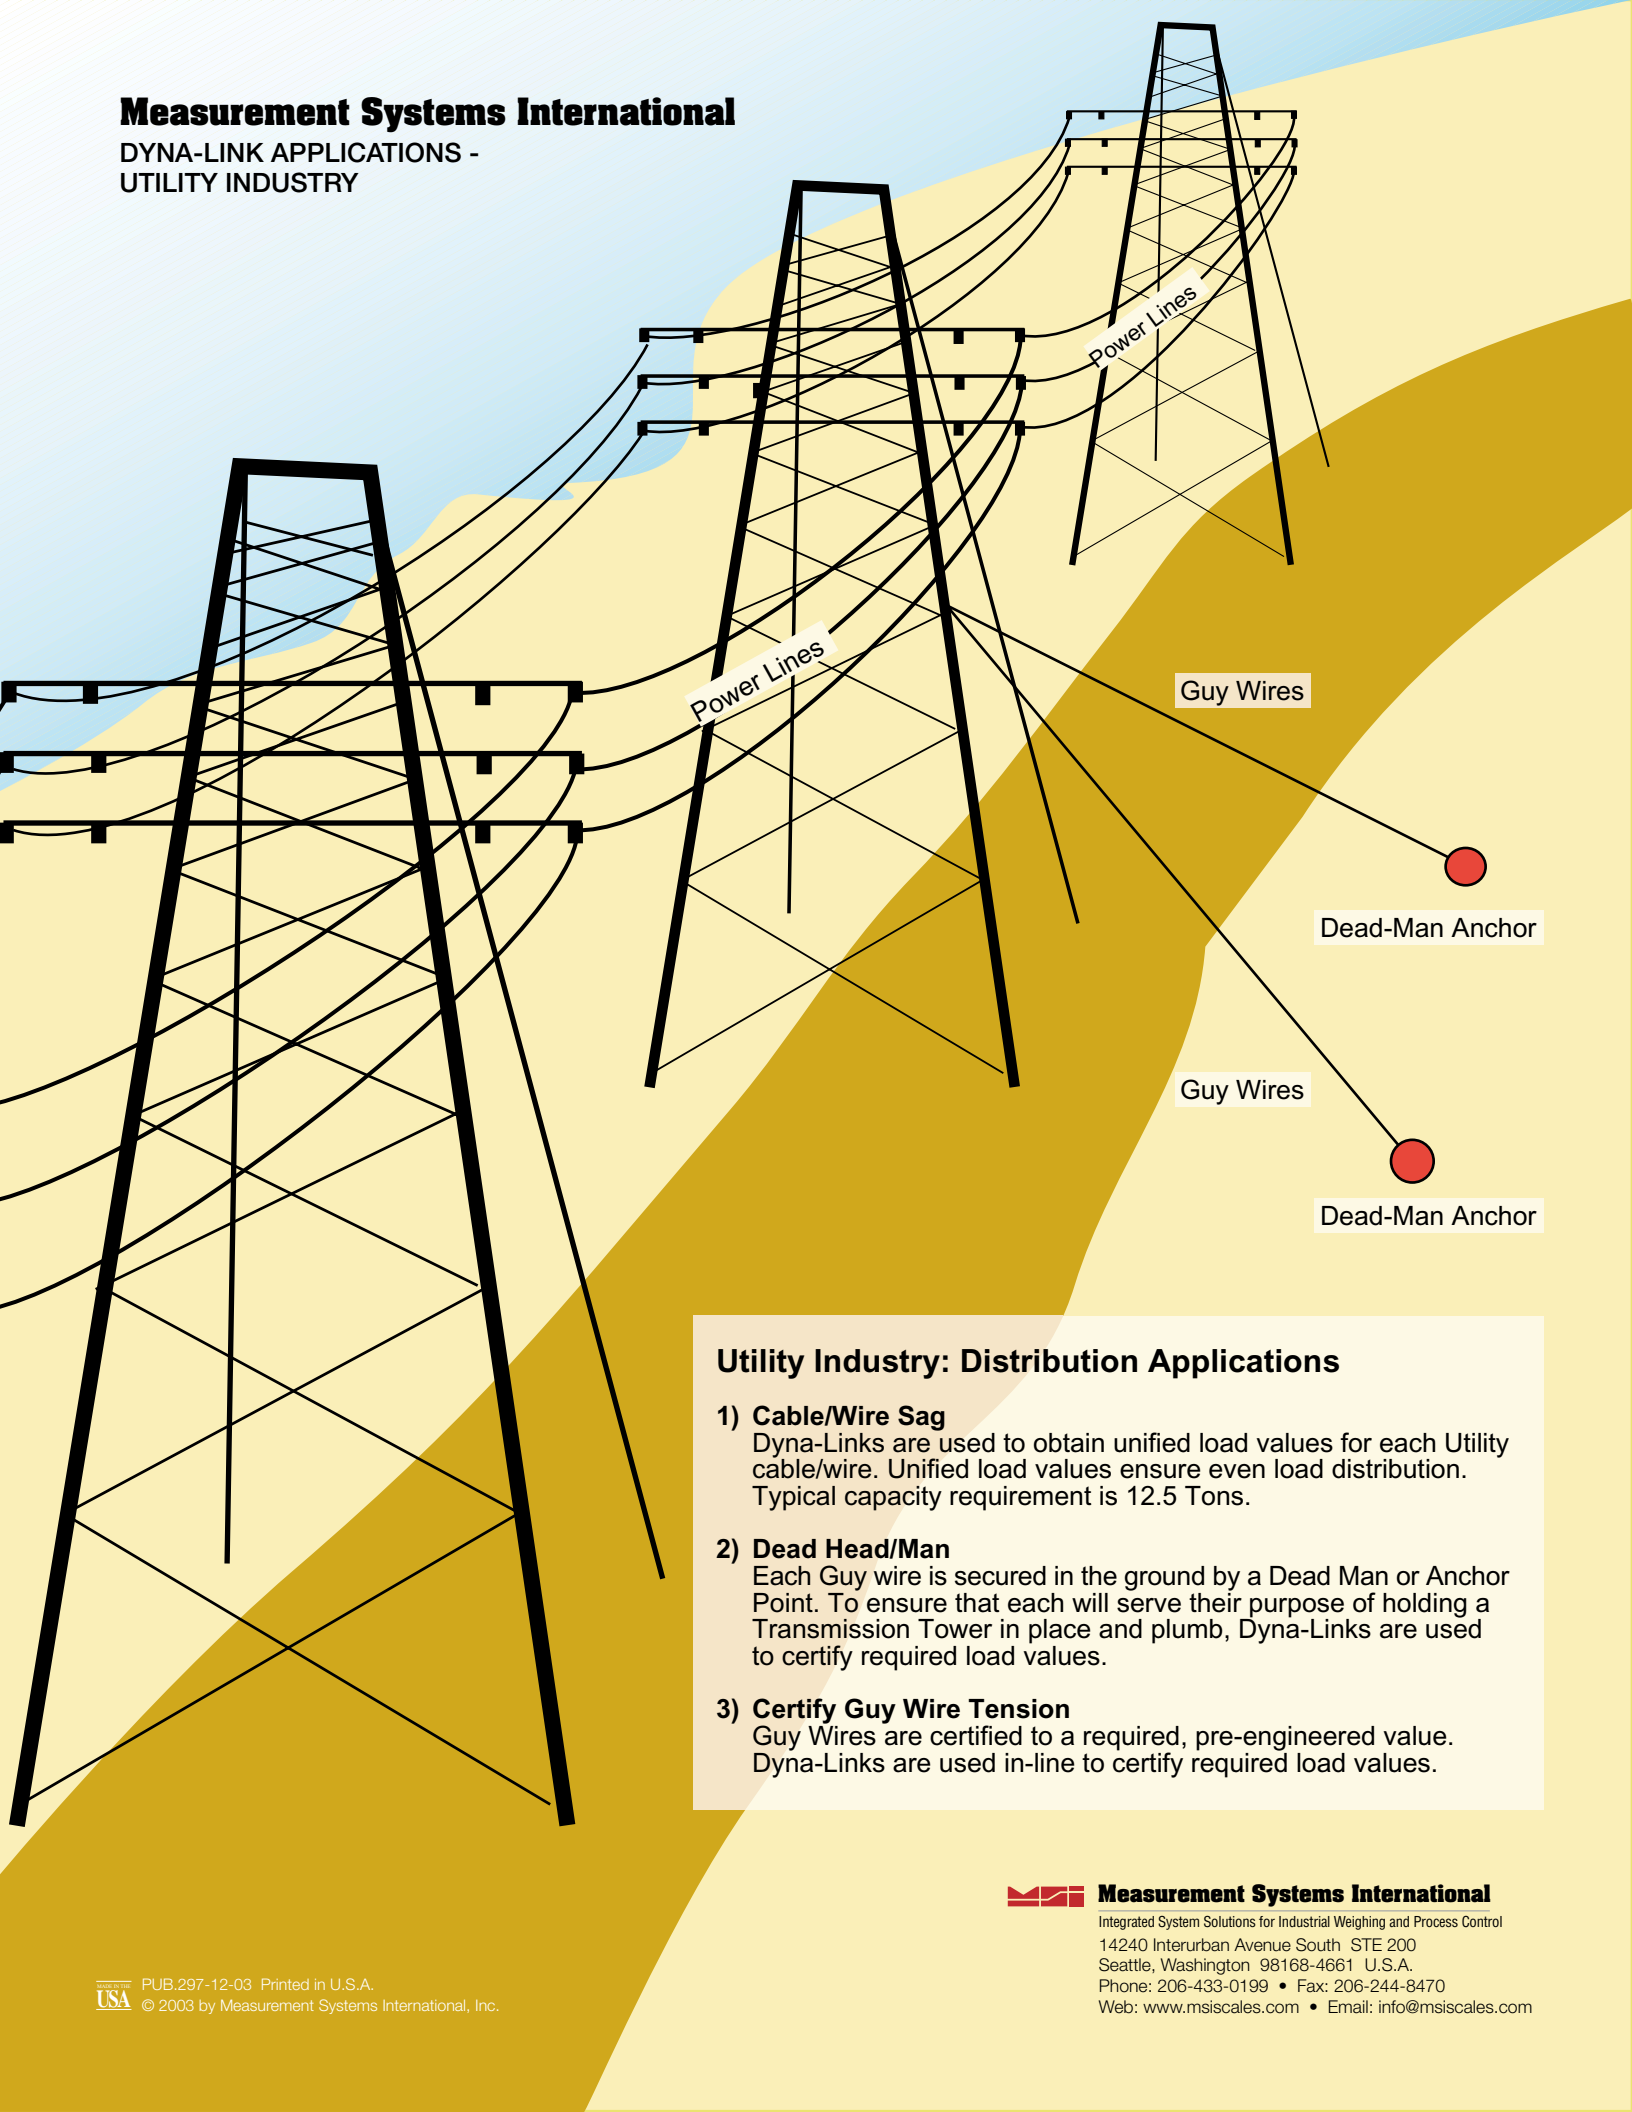

## Utility Industry: Distribution Applications

- 1) Cable/Wire Sag**  
Dyna-Links are used to obtain unified load values for each Utility cable/wire. Unified load values ensure even load distribution. Typical capacity requirement is 12.5 Tons.
- 2) Dead Head/Man**  
Each Guy wire is secured in the ground by a Dead Man or Anchor Point. To ensure that each will serve their purpose of holding a Transmission Tower in place and plumb, Dyna-Links are used to certify required load values.
- 3) Certify Guy Wire Tension**  
Guy Wires are certified to a required, pre-engineered value. Dyna-Links are used in-line to certify required load values.



### Measurement Systems International

Integrated System Solutions for Industrial Weighing and Process Control  
14240 Interurban Avenue South STE 200  
Seattle, Washington 98168-4661 U.S.A.  
Phone: 206-433-0199 • Fax: 206-244-8470  
Web: [www.msiscal.com](http://www.msiscal.com) • Email: [info@msiscal.com](mailto:info@msiscal.com)